


SYSTEM BNP-EX

Standard-Output Ballast-Operated Cold Cathode for Export

Ordering Information

Ordering information for System BNP-EX (standard-output ballast-operated cold cathode for export)

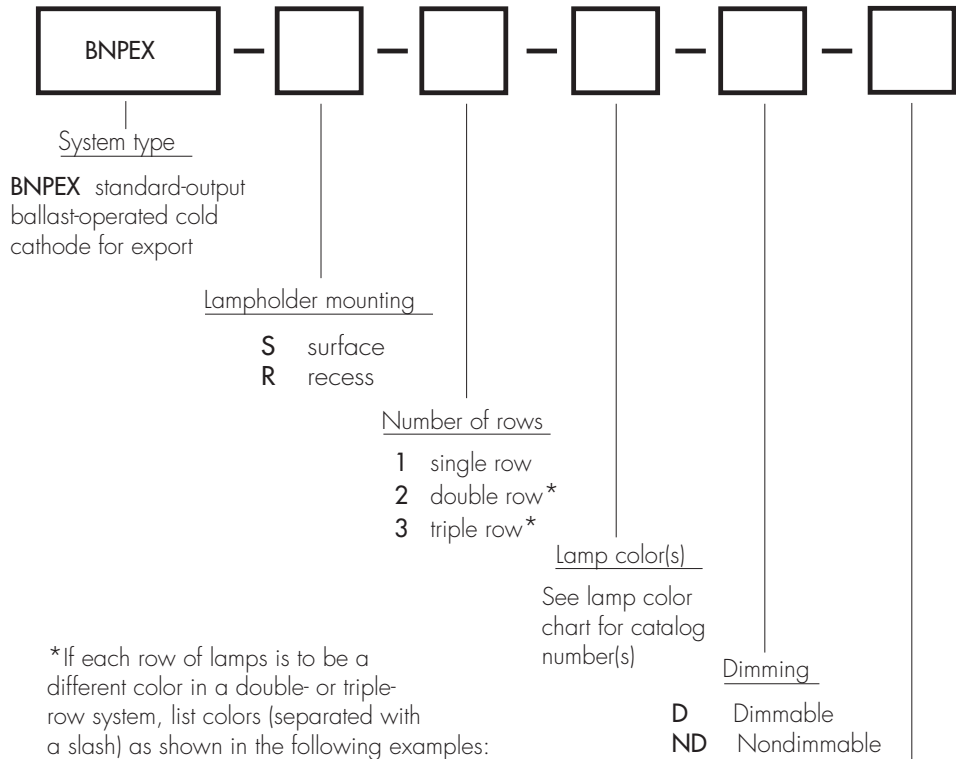

*If each row of lamps is to be a different color in a double- or triple-row system, list colors (separated with a slash) as shown in the following examples:

BNPEX - S - 2 - 28TC / 50TC - D - 120
(two rows of lamps, one 2800 K incandescent white and one 5000 K ice white)

BNPEX - S - 3 - GR / DB / HP - D - 120
(three rows of lamps, one green, one deep blue, and one hot pink)

Voltage
236 236 volts 50/60 Hz
100 100-120 volts 50/60 Hz

example: **BNPEX - S - 1 - 28TC - D - 236**

standard-output ballast-operated cold cathode for export

surface-mounted lampholders

single row

236 volts 50/60 Hz

dimmable

2800 K incandescent white lamps